

Surveillance & Security Products

H.264 Standalone DVR - Skyview SZT-8000 Series Model No. SZT-8004, SZT-8008, SZT-8016

*** New Product**



40-6155 4 CH SRP \$ 568.00



*** With DVD-RW built-in**

40-6162 8 CH SRP \$ 1,090.00
40-6179 16 CH SRP \$ 1,460.00

- 4 / 8 / 16 channels Video and Audio input
- Live Display frame Rate 120 fps / 240 fps / 480 fps
- GUI supports resolution 1280 x 1024
- Outputs - Call Monitor BNCx1/ Main Monitor BNCx1 (TV) VGAX1
- Internal Storage - 2 x SATA - 1 TB (tested)
- Export - USB 2.0 port. Supports USB thumb drives and Ext. DVD-RW
- Communication: RJ45, Central Management Software included.
- Remote operation supports Live View, Playback, Live recording, Backup, System setup, Archive. DDNS auto detection and PPPOE, Motion detection Marker
- Remote Viewing and operation supports through 3G Mobile phone and IE browser
- RS485: D-Sub
- PTZ Dome Control supports multiple protocol: Pelco P, Pelco D, AD422, Fastrax 2, Panasonic.
- **Hard Drives not included.**

Skyview SZT-160L Surveillance 4-port card

*** Linux Based New**



- BNC Connector, PCI Interface
- 1 Card 4 port @ Max 2 Card
- 120 fps (NTSC) 100 fps (PAL) – Recording & Display Rate.
- Video Input: 4 CH
- Audio input: 1 CH
- Resolution: 352x288 / 640x240 / 640 x 480
- Compression: MPEG4
- CMS (Central Management Software) included.

40-1211

Skyview SZT-216L Surveillance 8-Port Card

***Linux Based New**



- BNC Connector, PCI Interface
- 1 Card 8 port @ Max 2 Card
- 240 fps (NTSC) 100 fps (PAL) – Recording & Display Rate.
- Video Input: 8 CH
- Audio input: 1 CH
- Resolution: 352x288 / 640x240 / 640 x 480
- Compression: MPEG4
- CMS (Central Management Software) included.

40-1112


Secu Master SM-400 Surveillance 4-port card



- BNC Connector, PCI Interface
- 1 Card 4 port @ Max 4 Card
- 120 fps (NTSC) 100 fps (PAL) – Recording & Display Rate.
- Resolution: up to 640 x 480 pixels
- Compression: Wavelet, Motion JPEG, MPEG4
- Key Features includes: Panic Button, POS functions, Central Control Centre, Unlimited HD expansion, E-Map etc.

40-2003

Skyview 620 Surveillance 4-Port Card



- BNC Connector, PCI Interface
- 1 Card 4 port @ Max 4 Card
- 30 fps (NTSC) 25 fps (PAL) – Recording & Display Rate.
- Resolution: up to 640 x 480 pixels
- Compression: Wavelet, MPEG4
- Remote Transmission: PSTN, ISDN, LAN, DDN, ADSL.
- Operating System: Windows 2000, Windows XP
- CPU: Intel Pentium 2.8G or above.

40-1532

Skyview MS-400 Surveillance 4-port Card



- BNC Connector, PCI Interface
- 1 Card 4 port @ Max 4 Card
- 120 fps (NTSC) 100 fps (PAL) – Recording & Display Rate.
- Resolution: up to 640 x 480 pixels
- Wavelet Image Compression
- Remote Transmission: PSTN, ISDN, LAN, DDN, ADSL.
- Operating System: Windows 2000, Windows XP
- CPU: Intel Pentium IV 2.8GHz or above.

40-1600

Skyview MX-810 Surveillance 8-port Card



- BNC Connector, PCI Interface
- 1 Card 8 port @ Max 2 Card
- 120 fps (NTSC) 100 fps (PAL) – Recording & Display Rate.
- Resolution: up to 640 x 480 pixels
- Wavelet Image Compression
- Remote Transmission: PSTN, ISDN, LAN, DDN, ADSL.
- Operating System: Windows 2000, Windows XP
- CPU: Intel Pentium IV 2.4GHz or above.

40-1617

Vandal Resistant / Vari-Focal Dome Cameras

23H4 1/3" Color CCD High Resolution Vandal Resistant Dome w/ LED



- 6.00mm Lens F2.0
- 12 LED 10 - 15M
- 460 Line Hi resolution
- Water Resist IP66
- Auto white balance
- Auto iris video/DC/AES
- 12VDC / 210mA

40-4632

03G4-P 1/3" Color CCD High Resolution Vandal Resistant Vari-Focal Lens Dome



- Vari-focal lens 4 – 9 mm auto IRIS lens
- 1.2 Lux illumination @ F1.8
- More than 480 Line Hi resolution
- Water Resist Pass IP66
- Auto white balance
- 12VDC / 210mA
- 108 x 75(H) mm

40-4625

PTZ Pan-Till-Zoom Cameras

Outdoor 270x Sony PTZ Camera



- 27X optical 10X digital
- Compact Size: 6". Outdoor
- 1/4" Sony Super HAD CCD
- 480 TV lines
- 47° wide end to 3.0° tele end
- 1 Lux Day/night (0.1 Lux)
- PAL / NTSC
- RS-485 Communication Protocol

40-5578

Indoor 270x PTZ Camera



- Compact Size: 6". Outdoor
- 1/4" Sony Super HAD CCD
- 480 TV lines
- 47° wide end to 3.0° tele end
- 1 Lux Day/night (0.1 Lux)

40-4359

Outdoor Day/ Night CCD Camera with Illuminator

TC-3405 Outdoor 1/3" Colour CCD Camera w/ LED



- Hi-Res: More than 480 TV lines
- 84 pcs LEDs 30-40 Meter.
- 1.2 Lux/ F1.8. IR on: 0 Lux
- Auto Electronic Shutter
- Auto White Balance
- Lens: 8.0mm F2.0
- 1.2A DC 12V

40-5585

TC-3413 Outdoor 1/3" Colour CCD w/ LED



- Hi-Res: More than 480 TV lines
- 70 pcs LEDs 50 Meter.
- 1.2 Lux/ F1.8. IR on: 0 Lux
- Auto Electronic Shutter
- Auto White Balance
- Lens: 8.0mm F2.0
- 12V DC / 1A

40-5554 *** temp out of stock

TCD-30M2 "Dual CCD" Outdoor Camera New



40-5592

- 1/3" Color CCD + 1/3" B/W CCD
- Fixed 8mm Iris Lens
- More than 420 TV Lines
- Day: 1.0 Lux F=1.8
- Night: 0 Lux F=2.0 IR on
- Auto White Balance Control
- NTSC or PAL System
- DC 12V 900mA ~ 1300mA

Sony 1/3" Hi-Res Color CCD Camera with IR LED 4 - 9 mm Vari-focal



40-3246

- 1/3" Color CCD sensor
- Lens 4 - 9mm Vari-focal
- Water resistant of Aluminum die-cast - IP66
- More than 540 TV Lines
- 1.2 Lux / F1.8
- Auto Electronic Shutter
- Auto white balance, Auto gain control
- DC12V / 380mA

Super Ultra Mini - CG-25N Color CCD Camera in Metal Case. Easy to conceal, and install



- 1/4" DSP Color CCD
- Mini Fixed 3.6mm Iris Lens
- 380 TV Lines
- 1.0 Lux F=2.0
- Auto Shutter Auto Gain Control
- Auto White Balance Control
- NTSC or PAL System
- Mini size 27 x 39 x 36 mm

40-3512

Hi Res Sony CCD Color Dome Camera

*HOT



- 1/3" Sony Color CCD sensor
- 420 TV Lines
- 0.28 Lux / 3.6mm
- Auto Shutter / Auto Gain Control
- Auto White Balance Control
- Base Dia. 4" x H 3"
- 12VDC Input

40-4335

Rain Proof Hi Res Sony CCD Color Dome Camera w/ IR



- Aluminum Shell. 29LED 25Meter**
- 1/3" Sony Color CCD sensor
 - 420 TV Lines
 - 0.28 Lux / Focal length 6.0mm
 - Auto Shutter / Auto Gain Control
 - Auto White Balance Control
 - Base Dia. 3.5" x H 3"

40-4366

Super Hi Res Sony CCD Color Dome Camera

* NEW



- 1/3" Sony Color CCD sensor
- 520 TV Lines
- 0.28 Lux / 4.0mm
- Auto Shutter / Auto Gain Control
- Auto White Balance Control
- Base Dia. 4" x H 3"
- Dual power: AC24/ 12VDC Input

40-4311

Super Hi Res Sony CCD Variable Focus Color Dome Camera

*NEW



- 1/3" Sony Color CCD sensor
- 520 TV Lines
- 0.28 Lux / 3.5 - 8.0 mm adjustable
- Auto Shutter / Auto Gain Control
- Auto White Balance Control
- Base Dia. 4" x H 3"
- Dual power: AC24/ 12VDC Input

40-4328

TC 32-LB 1/3" Mid-Res Color Camera



- 1/3" Color CCD sensor
- Lens 4.0mm / F2.0
- Water resistant of Aluminum die-cast - IP66
- More than 380 TV Lines 1.0 Lux / F1.8
- Auto Electronic Shutter
- Auto white balance, Auto gain control
- DC 12V / 170mA
- Adjustable sun / weather shield
- NTSC or PAL System
- Beige Colour

40-5479

CM-25WN Sony Super HAD Color DSP Finger Camera with 20 IR LEDs 15M

*Best Seller



- 1/3" Sony Color CCD Image Sensor
- Finger DSP Camera with IP65 weather proof bracket
- Lens IR Cutting: 3.6 mm F2.0 Lens
- 420 TV Lines
- 0 Lux (mono) with IR LED's
- 20x IR LED's @ 15 meters
- Auto Electronic Shutter Auto Gain Control
- Photo Cell to Switch LED's on / off
- Regulated DC 12V Input
- Adjustable sun / weather shield
- NTSC or PAL System

40-5516

Box cameras & Lens

1/3" High Resolution Colour CCD **Vari-Focal** Lens Box Camera (TC-3412)



- 1/3" Color CCD sensor
- Built-in auto iris vari-focal lens 4.0mm – 9.0mm
- High resolution: more than 480 TV lines
- 1.2 Lux / F1.5
- Auto white balance, Auto gain control
- Auto backlight compensation
- Regulated DC 12V Input 110mA
- 126(L) x 46(W) x 46(H) mm

40-4267

Super Hi-Res SONY Color "Super HAD" DSP 1/3" CCD



* Lens not included

- 520 TV lines, 0.025 Lux
- Digital Signal Processing
- Auto Iris DC / Video Drive
- Line Lock
- Backlight compensation
- Auto Electronic Shutter, Auto Gain Control
- Auto White Balance
- Dual Power Input 12V DC / 24V AC

40-4014

TC-3211 Color Mid Resolution



*** Lens not Included

- 1/3" CCD Color Image Sensor
- More than 380 TV lines (Mid-Res)
- 0.8 Lux / F1.5
- Auto Iris DC / Video Drive
- Auto Gain Control
- Auto White Balance Control
- Backlight Compensation
- Short Metal Case
- DC 12V / AC 24V Input
- NTSC or PAL System

40-4250

CC25NV Color Mid Resolution (Day/Night) IR Sensitive Camera



*** Lens not Included

- 1/3" CCD Color Image Sensor
- 420 TV lines, 0.5 Lux
- C / CS Lens Mount
- IR Sensitive (Day & Night)
- Auto Iris DC / Video Drive
- Auto Gain Control
- Auto White Balance Control
- Backlight Compensation
- Mirror / Digital Zoom Function 2X
- Short Metal Case
- DC 12V Input
- NTSC or PAL System

40-4229

Dummy Bullet Camera with mount.



- Requires 4x AA batteries
- Red light indicator
- Include mounting bracket (40-9316)

40-5561



3.5 – 8.0 mm Varifocal Lens & Auto Iris Direct Drive 40-8142

6.0 – 15.0 mm Varifocal Lens & Auto Iris Direct Drive 40-8159

6.0 – 60.0 mm Varifocal Lens & Auto Iris Direct Drive 40-8173

5.0 – 100.0 mm Varifocal Lens & Auto Iris Direct Drive 40-8180

Infra-Red Illuminator Panel (15-IL05)



- Built-in Hi-Power Infrared LED.
- Switch on/ off by Photo Conductor (CdS)
- Power Consumption: DC 15V/ 800mA
- Illuminant range: 60 degree / 10m
- Dimension: 161x122x25mm

40-9873


High Infrared Illuminator – 30M (15-IL06-30)



- *Outdoor metal cylinder typr
- Built-in 7 high illumination infrared LED's
- Auto switch on while under 10 Lux by Photo Conductor (CdS)
- Illuminant range up to 30 Meters
- Power Consumption: DC12V / 350mA
- Indoor and outdoor use, IP65 waterproof
- Dimension: 125x145mm (for metal cylinder only)

40-9880

2.4GHz Mini Wireless Video and Audio Transmitter and Receiver

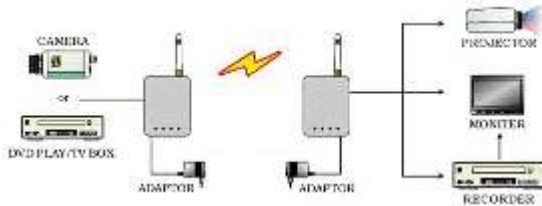

40-2324

- Power Input DC+9V-DC12V. Power Adapter included.
- Input and Output Video and Stereo Audio Signal
- 1 2 3 4: 4 Channels Selections to avoid interference

Digital Video/Audio signal to TV Channel Modulator

For setting up Security Cameras and view on your TV Channel.



- Channel switch from CH 14-69 (NTSC, TV)
- Frequency range: 471.25MHz- 855.25MHz
- Antenna input frequency from 50 MHz-900MHz
- AGC (Auto Gain Control) function
- Un to 200M transmission distance
- Power off memory
- Size: 75x64x25mm

40-8814

CCTV 4 Channel Video Extender Transceiver 15-W104VH 4 x BNC to 1 x RJ45



Allows transmission of 4 video signals down a single UTP cable, with exceptional interference rejection.

- Up to 600 meters
- No Power required
- Built-in impedance coupling device and noise filter for interference immunity.
- Dimension: 110x24x77 mm

40-9132

Composite Video Extender with Audio over Cat 5 1 x BNC + Audio to 1 x RJ45



Allows transmission of video and audio up to 200 meters and requires no external power supply.

- BNC and 2 RCA to RJ 45
- Video & Audio
- Built-in Video couple device and audio impedance matching device.

40-9118

W100V Video Transceiver 1 x BNC to 1 x RJ45 (UTP TX/RX 600m)



Allows transmission of a single video signal up to 600 meters, requires no external power supply.

- BNC plug to RJ-45 Jack
- Video only transmission distance up to 600 meters
- Built-in impedance couple device and noise filter.

40-9019

Video Transceiver (Keystone Type for Wall-mount flush plates) 1 x BNC to 1 x RJ45



Allows transmission of a single video signal up to 600 meters, requires no external power supply.

- BNC plug to RJ-45 Jack

40-9026

15-W100VP CCTV Video Transceiver with DC plug for camera power transmission



Allows transmission of a single video signal up to 600 meters, requires no external power supply.

- BNC plug to RJ-45 Jack
- Video only transmission distance up to 600 meters
- Built-in impedance couple device and noise filter.

40-9033

Mini Automatic Pan Bracket (AS-10M)



- Mini Case
- Automatic panning
- Pan angle is set by jumper pegs
- Only for use with camera Indoor use only

40-9217

Angle Mounting Bracket (B001)



- Mini size. Wall Mount. Ceiling Mount.
- Height: 130 mm Base: 45mm

40-9316

HQ Steel Wall Mounting Bracket (B006)



- Heavy Duty
- Length 283mm
- Base: 97 x 84 mm

40-9330

Straight Metal Mounting Bracket 9" Tri-foot Base (B103A)



Fixed height Camera mounting bracket triangular fixing base dia 100mm x 3mm holes

- 9" height
- B variant square base 63 x 63 x 63mm
- C variant corner bracket 73 x 85 x 34mm
- D variant bar ceiling clip 44 x 27 x 6mm

40-9347

HQ Steel Wall Mounting Bracket (B006)



- Heavy Duty
- Length 225mm
- Base: 105 x 75 mm

40-9378

Wall Mounting Bracket (15-B103A)



- AV & Power cable protection

40-9347 *temp out of stock.

able Managed Ext Camera Housing with Heater & Fan (15-AH28)



- Aluminum construction
- Accepts AC24V, 110V or 220V Input
- Heater & Fan – Auto On
- Cable Management ready
- Max camera Size: 245 x 70 x 70 mm

40-9859

Outdoor Camera Housing with Heater & Fan (AC24) (TP-606HB)



- Aluminum construction
- AC24V Input
- Heater & Fan – Auto On
- Cable Management ready
- Size: 410 x 118 x 107 mm

40-9842

Power Adapters for Cameras - 

Regulated / Switching Power Adapters

12V 300mA

 * with plug
 036192 036208

12V 500mA

 036222

12V 1200mA

 036239

12V 2500mA

 036284

12V 4100mA

 036215

AC/DC 3-12V Switching Adapter with movable plug



* 3 - 12 V Switching
 * 1700mA
 03-6277

AC 24V



03-6185

8-way Terminal Block Bus Bar



03-0701

5A Terminal Block



973015

DC 1 to 2 Plug Power Splitter cable 1F to 2 M



03-6444

DC Plug splitter cable – 1F to 4 M



03-6451

DC Plug with Terminal Block 10" Male



03-6413

DC Plug with Terminal Block 10" Female



03-6420

Low Cost Cables

Siamese Cable with Power



BNC Cable with Power – DC Plug Male / Female

- 213265 25'
- 213272 50'
- 213289 75'
- 213296 100'
- 213302 150'

RG6 Coaxial Cable – 100' w/o ends



- 65% Shielding
- 991446

RG6 Solid Coaxial Cable – 1000' box



- * 18 AWG Copper Clad Steel
- * 36 AWG Aluminum Braiding
- * Nominal 65% shielding
- * PVC Jacket 0.27"

215573 (1000')

RG59+Power Siamese Cable CMR UL - 500ft Pure Copper



- RG59/ 20AWG CMR (UL)
- Power: 2 x 18AWG
- 500 ft box

215665

Premium Quality CCTV / CATV cables – Pure copper wire braid, UL




RG59 (CCTV) Item No. 21-5689
0.813MM Bare Copper Bare
Copper Wire Braid, 6.0mm PVC.

RG6 (CCTV) Item No. 21-5580
1.02mm Bare Copper, 4.80mm
Foam P.E. Bare Copper Wire
Braid, 6.86mm PVC




RG6 (CATV) Item No. 21-5603
1.02mm Bare Copper, 4.80mm
Foam P.E. Tinned Copper Wire
Braid, **Aluminum foil**, 6.86mm
PVC

1,000 ft / Box



RG59 + Power (Siamese) Item
No. 21-5696

0.813mm Bare Copper,
Bare Copper Wire Braid,
6.0mm PVC + 2 * 18AWG
Red & Black Copper wire.
Packing: 1000FT / Drum



Save on Coaxial Cable Cost -
use Combined RJ45 UTP Cat5
cable w/ Power

Connect up to 4 surveillance
cameras w/ BNC to RJ45
Transceivers (not included)

Tools

Multi-purpose Cutter and
Stripper (10 functions in
1)



28-3213 MSRP \$19.00

Multi-purpose Cutter and
Stripper with lock
(1.6/1.3/1.0/0.8/0.6/0.5mm)



28-3152
17

Cutter and Stripper (0.5 -
4.0mm) with Brinding



28-3015
11

Rotary Coaxial Cable
stripper (3-blade)



280137 18.50

Rotary Coaxial Cable
stripper (2-blade)



280083 17.

Ratchet Crimping Tool
for "F" type RG59, 62, 6
(8.20 & 9.12mm)



280090 22

Ratchet Crimping Tool for
RG58, 59, 62, 6 & centre
pin



280106 33

Cable Tie Fasten Tool



28-5187 25

Crimping Tool for RG6
waterproof "F" type
connectors



28-0816 21

Crimping Tool for
Waterproof BNC, RCA and
"F" type connector



28-0830 58

Premium quality (US Pat. 6241553)

indoor/ outdoor waterproof connectors
(compression type)



RCA Waterproof Connector
040656

RG6 Waterproof "F" type connector
217782

RG6 Waterproof BNC Connector
217799

Compression type "F" Connectors
216914 (50 pcs /bag)



Nylon Cable Ties – Top quality cable ties by KSS, packed by original manufacturer.



- 025110 Cable Tie 4" (1000 pcs/bag)
- 025318 Cable Tie 6" (100 pcs/bag)
- 025325 Cable Tie 6" (1000 pcs/bag)
- 025332 Cable Tie 6" (1000 pcs/bag)
(3.6mm thick)
- 025516 Cable Tie 8" (100 pcs/bag)
- 025523 Cable Tie 8" (1000 pcs/bag)
- 025158 Black Cable Tie 4" (1000 pcs/bag)
- 025356 Black Cable Tie 6" (100 pcs/bag)
- 025363 Black Cable Tie 6" (1000 pcs/bag)
- 025554 Black Cable Tie 8" (100 pcs/bag)
- 025561 Black Cable Tie 8" (1000 pcs/bag)
- 025615 Marker Tie 4" (100 pcs/bag)
- 025653 Marker Tie 8" (100 pcs/bag)
- 024519 Velcro Magic Tie 5" (20 pcs /Bag)
- 024618 Velcro Magic Tie 8" (20 pcs /Bag)
- 024717 Velcro Magic Tie 12" (20 pcs /Bag)



Flush Plates



216303 Blank (no holes)

- 216310 1-port White
- 216327 1-port Beige
- 216334 2-port White
- 216341 2-port Beige
- 216358 3-port White
- 216372 4-port White /Beige
- 216396 6-port White/ Beige

Flush Plate Mounting Bracket - metal



216716

Flush Plate Surface Mount Bracket



216709

Inserts & Keystone type connectors



- Blank insert for Flush Plate
- 217812 White
- 217836 Beige



- BNC connector for Flush Plate
- 217911



- RCA F/F Keystone Wall Plate insert - gold plated - Red, White, Yellow
- 992610 (R) 992603 (Y) 992627(W)



- S-Video (Mini Din 4) connector for Flush Plate
- 217928



- TV "F" connector for Flush Plate
- 217935

Adapters, Converters, Connectors ...

RCA connector Crimp-on type Male (Metal type)



040687

RCA Male to "F" Female Adapter



040694

RCA Female to 3.5mm Male



040700

RCA Male to BNC Female Adapter



040717

RCA Female/BNC Female Gold-pin Adapter



040748

RCA Inline Coupler F/F



040731

RCA connector Crimp-on type Male (Plastic type)



040670

RG59/62 BNC connector Crimp-on type Male



217430

RG6 BNC connector Crimp-on type Male



217393

RCA Female to BNC Male Adapter



040724

BNC Adapter "F" Female/RCA Female



217768

"F" connector inline coupler F/F



217447

BNC inline coupler F/F



217478

BNC Female to "F" Male Adapter



217607

BNC Male to "F" Female Adapter



217591

RG59/62 BNC connector Twist-on type Male



217546

RG6 BNC Twist on



217522

RG59 Quadshield "F" connector Crimp-on type



217409

RG6 Quad-Shielded "F" Connector – Crimp-on



217454

BNC Y connector 1*male / 2*female



217775

6mm Cable Clip (100 pcs/bag)



025813

7mm Cable Clip (100 pcs/bag) - Black



991422

8mm Cable Clip (100 pcs/bag)



025813

8mm Cable Clip (100 pcs/bag) - Black



025820

Cable 8mm Clip – Double (100 pcs/bag) - Black



025837

Old Models, black & white cameras - Clearance Sale

CD-20 B/W CCD Dome Camera 3.5"



- 1/3" CCD,
- 0.1 Lux @ f 2,0
- 380 TV Lines,
- 3.6mm lens,
- 12v operation

40-3017 ***Clearance**

CG-30 B/W CCD Camera



- Monochrome Camera
- 3.6 mm Lens
- 420 TV Lines
- 0.1 Lux
- DC 12V Input
- 30cm cable with RCA Video Connector
- 2.1 mm DC jack

40-3215 ***Clearance sold out**

CM-20 B/W CCD Camera (Finger Style with Stand)



- 1/3' Monochrome CCD Finger Camera
- Mini Fixed Iris 3.6 mm Lens
- 420 TV Lines
- 0.1 Lux
- Auto Electronic Shutter
- Auto Gain Control
- DC 12V Input

40-3253 ***Clearance \$ sold out**

- End - - E. & O.E. - Please note: Manufacturer may change specification or design without prior notice.